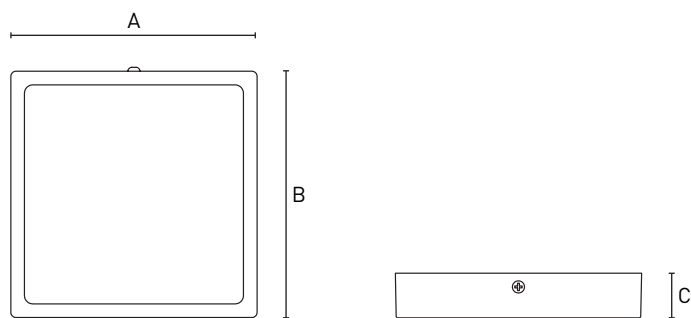


TECHNICAL PARAMETERS

Voltage	AC 90-265 V	Diffuser	PMMA
Frequency range	50 ~ 60 Hz	LED chips	SMD
Working temperature	-40 °C to +35 °C	Protection class	II.
Colour rendering index	80 Ra	Material	Aluminium
IP rating	IP 20	Mounting	surface
Lifetime	50 000 h	Energy class	F
Beam angle	120°		

PRODUCT VARIANTS

ORDER NUMBER	POWER	COLOR TEMPERATURE	LUMINOUS FLUX	DRIVER	LUMINAIRE EFFICACY	WEIGHT	COLOR	Ø A (mm)	C (mm)
134-0208	8 W	4000 K	640 lm	standard	min. >90 lm / W	0,16 kg	white	90 x 90	30
134-0209	16 W	4000 K	1280 lm	standard	min. >90 lm / W	0,32 kg	white	145 x 145	30
134-0210	22 W	4000 K	1760 lm	standard	min. >90 lm / W	0,44 kg	white	173 x 173	30
134-0211	30 W	4000 K	2400 lm	standard	min. >90 lm / W	0,66 kg	white	220 x 220	30