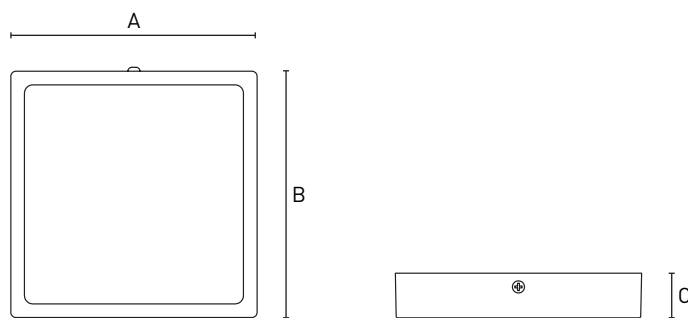


TECHNISCHE DATEN

Spannung	AC 90-265 V	Diffusor	PMMA
Frequenz	50 ~ 60 Hz	LED chips	SMD
Betriebstemperatur	-40 °C bis +35 °C	Schutzklasse	II.
Farbwiedergabeindex Ra	80 Ra	Material	Aluminium
Schutzart	IP 20	Montageart	Anbau
Lebensdauer	50 000 h	Energieeffizienzklasse	F
Strahlungswinkel	120°		

PRODUKTVARIANTEN

ORDER NUMBER	POWER	COLOR TEMPERATURE	LUMINOUS FLUX	DRIVER	LUMINAIRE EFFICACY	WEIGHT	COLOR	Ø A (mm)	C (mm)
134-0208	8 W	4000 K	640 lm	Standard	min. >90 lm / W	0,16 kg	Weiss	90 x 90	30
134-0209	16 W	4000 K	1280 lm	Standard	min. >90 lm / W	0,32 kg	Weiss	145 x 145	30
134-0210	22 W	4000 K	1760 lm	Standard	min. >90 lm / W	0,44 kg	Weiss	173 x 173	30
134-0211	30 W	4000 K	2400 lm	Standard	min. >90 lm / W	0,66 kg	Weiss	220 x 220	30